




Dimensions

series: VX136Q base, type inline

W


Attention

space required for
maintenance work
W=30 inches min.,
40 inches recommended

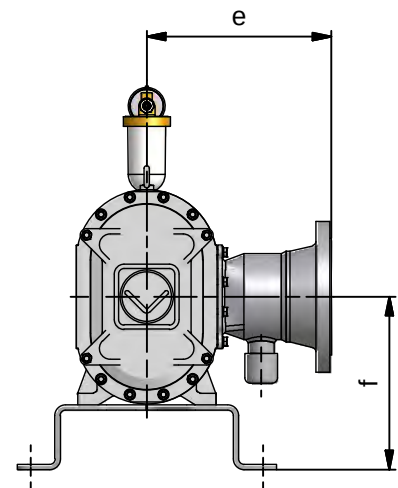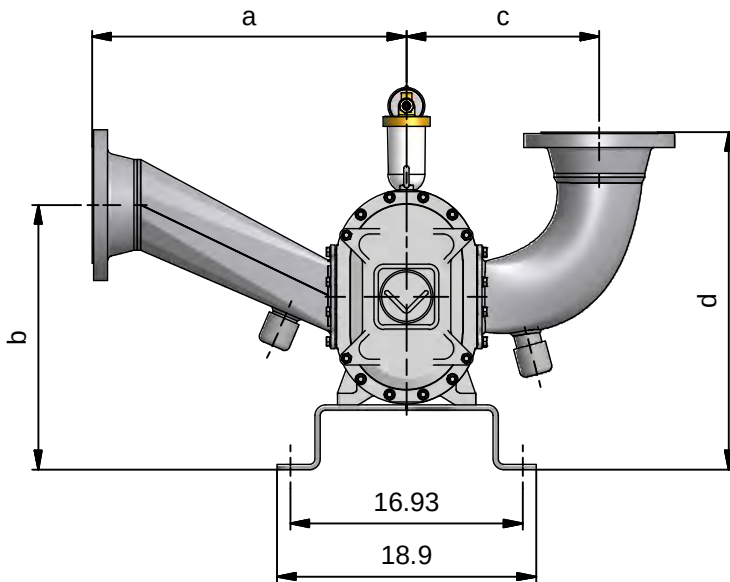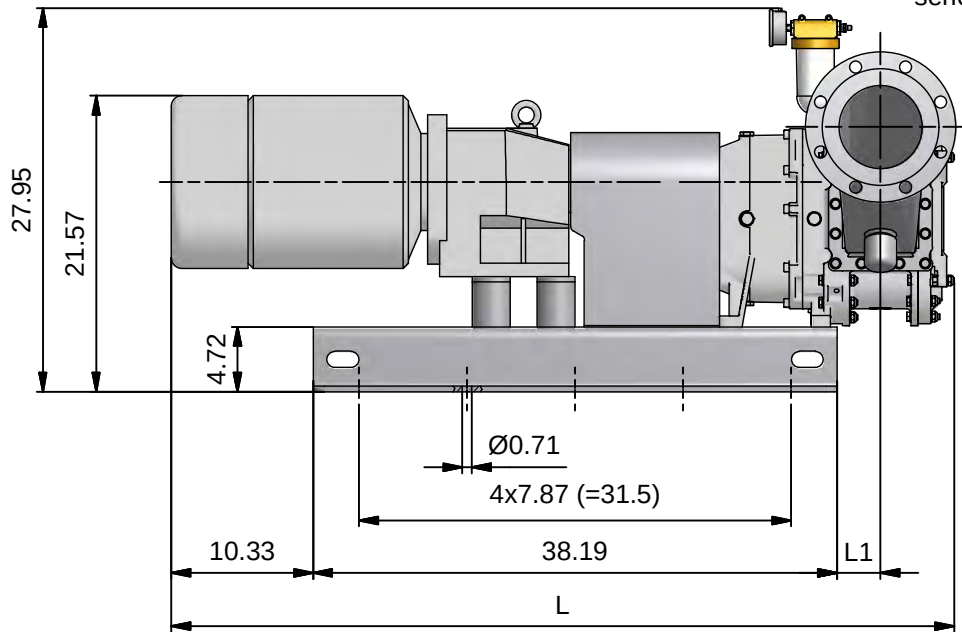

size	pump dimensions		standard flange ASME B16.5 150 lbs					gooseneck		90° bend		straight (not recommended)		weight (lb)
VX136-	L1	L	DN	d	D	k	n	a	b	c	d	e	f	1)
70Q	1.79"	54.33"	4"	0.75"	9"	7.5"	8	17.80"	17.32"	11.10"	21.26"	12.68"	12.60"	372
105Q	2.48"	55.71"						17.80"	17.32"	11.10"	21.26"	12.68"		416
140Q	3.17"	57.09"	6"	0.88"	11"	9.5"		22.91"	19.29"	14.06"	24.61"	13.46"		438
210Q	4.55"	59.84"						22.91"	19.29"	14.06"	24.61"	13.46"	537	

1) only pump with base

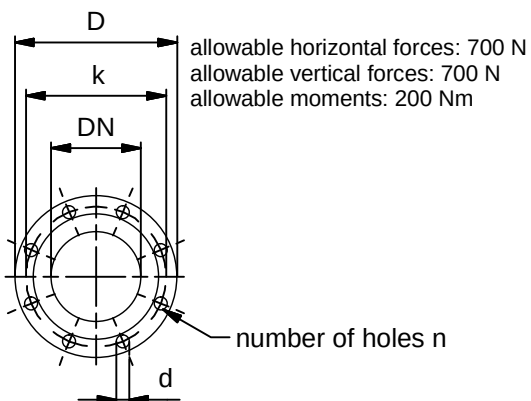

changes of dimensions reserved
dimensions without indication of
tolerances acc. to DIN ISO 2768, rough

part number connectors						
size	gooseneck		90° bend		straight	
VX136-	part number	weight (lb)	part number	weight (lb)	part number	weight (lb)
70Q	GPA.012	26.3	GPA.080	23.9	GPA.026	21.3
105Q	GPA.060	26.0	GPA.081	24.2	GPA.070	21.3
140Q	GPA.014	42.6	GPA.082	41.5	GPA.028	32.3
210Q	GPA.016	45.0	GPA.083	42.9	GPA.030	34.2

Vogelsang USA
7966 State Route 44
P. O. Box 751
Ravenna, OH 44266 USA



VOGELSANG
ENGINEERED TO WORK

dimensions shown in inches
fabrication tolerance is ± .12"

drawing no.: MAS0099

drawn by: Ellmann

checked by: Hesler

date: 20.04.2010

date: 20.04.2010

R: D