


Dimensions


series: VX186QD base, type inline

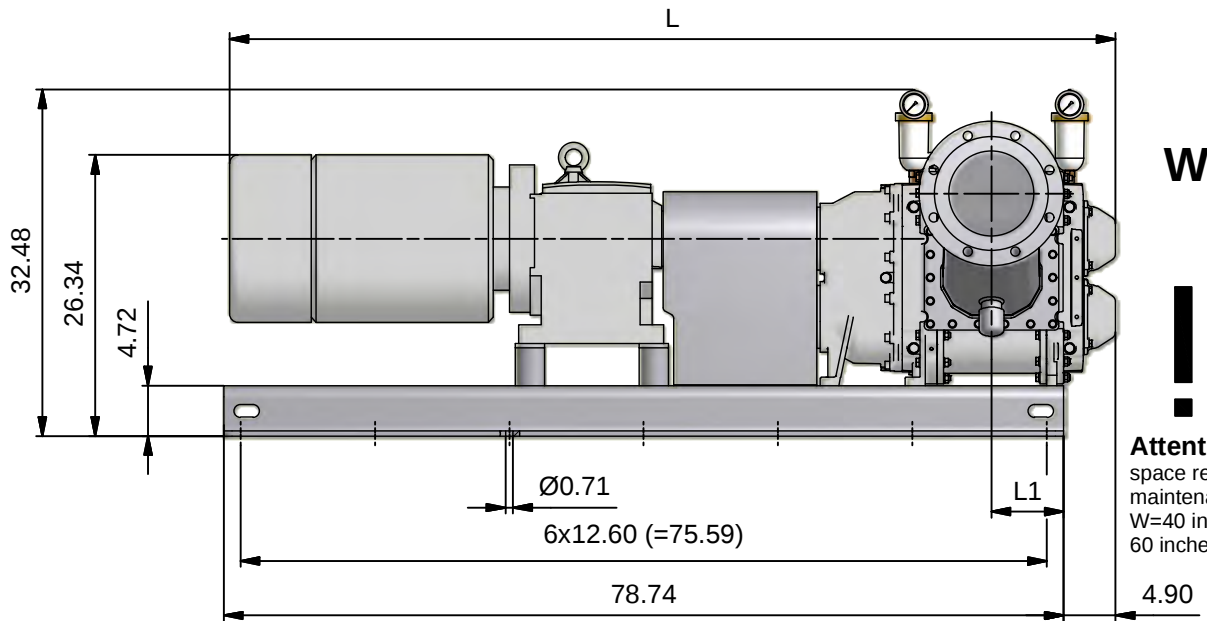

W


Attention

space required for maintenance work
W=40 inches min.,
60 inches recommended

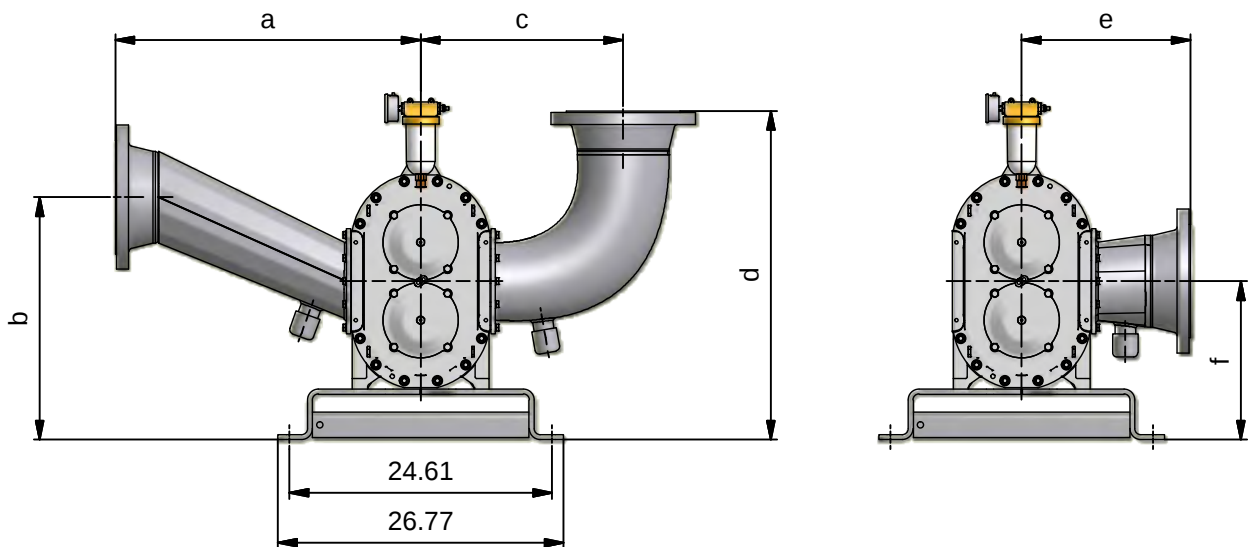

size	pump dimensions		standard flange ASME B16.5 150 lbs					gooseneck		90° bend		straight (not recommended)		weight (lb)
VX186 -	L1	L	DN	d	D	k	n	a	b	c	d	e	f	1)
130QD	4.19"	77.96"	6"	0.88"	11"	9.5"	8	24.29"	21.54"	15.43"	26.85"	14.84"	14.84"	960
184QD	5.25"	80.08"	8"		13.5"	11.75"	8	28.62"		18.98"	30.79"	15.83"		1005
260QD	6.74"	83.07"	10"	1"	16"	14.25"	12	25.31"	22.72"	16.42"	26.18"	17.80"	16.83"	1065
368QD	8.87"	87.33"								17.99"	26.26"		16.54"	1185
390QD	9.30"	88.19"								16.42"	26.65"		16.79"	1205
520QD	11.86"	93.31"	14"	1.13"	21"	18.75"		26.30"		18.78"	27.83"	22.32"	18.19"	on request
736QD	16.11"	101.81"												

1) only pump with base

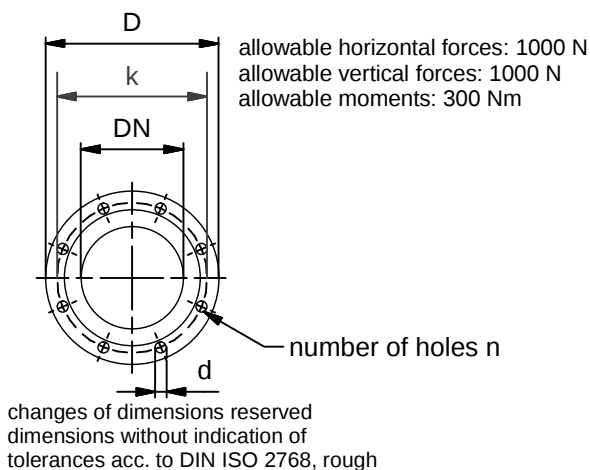

part number connectors						
size	gooseneck		90° bend		straight	
VX186-	part number	weight (lb)	part number	weight (lb)	part number	weight (lb)
130QD	GPA.151	44.8	GPA.161	44.9	GPA.171	34.6
184QD	GPA.156	46.9	GPA.162	45.8	GPA.176	36.7
260QD	GPA.157	83.6	GPA.163	76.1	GPA.177	57.9
368QD	GPA.149	104.5	GPA.132.T1	101.8	GPA.178	83.0
390QD	GPA.146	103.3	GPA.165.T1	105.7	GPA.175	82.1
520QD	GPA.159	110.4	CON0376	113.5	GPA.179	87.4
736QD	GPA.141	183.4	GPA.168.T1	186.5	GPA.180	165.5

Vogelsang USA
7966 State Route 44
P. O. Box 751
Ravenna, OH 44266 USA



VOGELSANG
ENGINEERED TO WORK

drawing no.: MAS0085
dimensions shown in inches
fabrication tolerance is $\pm .12"$

drawn by: Ellmann
checked by: Hesler

R: O
date: 20.04.2010
date: 20.04.2010